

NON-ISOLATED DC/DC CONVERTERS


4.5 V-14 V Input

0.75 V-3.63 V/10 A Output



V7BC-10E2Ax Series

- Non-Isolated
- High Efficiency
- High Power Density
- Excellent Thermal Performance
- Low Cost
- Flexible Output Voltage Sequencing (option)
- Remote Sense
- Wide Input
- Wide Trim
- OCP/SCP
- Remote On/Off
- Active Low/High (option)
- Over Temperature Protection
- Under-voltage Lockout (UVLO)
- Industrial Temperature Range

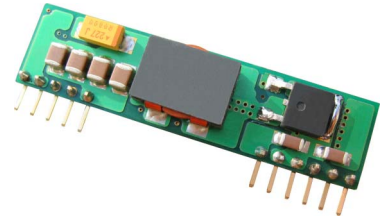

Description

The Bel V7BC-10E2Ax is part of the non-isolate dc/dc power converter series. The modules use a SIP package. These converters are available in a range of output voltages from 0.75 V to 3.63 V over a wide range of input voltage ($V_{in} = 4.5 \text{ V}-14 \text{ V}$). The Bel V7BC-10E2Ax has a sequencing feature that enables designers to implement various types of output voltage sequencing when powering. The efficiency is typically 94.3% at 3.3V output at 5.0V input at full load.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V- 3.63 V	4.5 V – 14 V	10 A	36.3 W	94.3%	V7BC-10E2AL	V7BC-10E2A0

Note: Add “G” suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Sequencing Voltage ¹	-0.3 V	-	V_{in}	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. V7BC-10E2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When not using the sequencing feature, either tie the SEQ pin to V_{in} or leave it unconnected.

NON-ISOLATED DC/DC CONVERTERS

4.5 V-14 V Input

0.75 V-3.63 V/10 A Output



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
Vo,set < 3.0 V	4.5 V	-	14 V	
Vo,set ≥ 3.0 V	Vo,set+1.5 V	-	14 V	
Input Current (full load)	-	-	8.6 A	An input line fuse must always be used.
Input Current (no load)	-	40 mA	-	
Remote Off Input Current	-	2 mA	-	
Input Reflected Ripple Current (pk-pk)	-	-	400 mA	Tested with one 1000uF/25V AL input capacitor with ESR=0.03 ohm max and 4 × 47 uF/16 V Tantalum capacitors with ESR=0.013 ohm max at 100 kHz, & simulated source impedance of 1000 nH, 5 Hz to 20 MHz.
Input Reflected Ripple Current (rms)	-	-	150 mA	
I ² t Inrush Current Transient	-	0.2 A ² s	0.4 A ² s	
Turn-on Voltage Threshold	-	4.3 V	-	
Turn-off Voltage Threshold	-	4.0 V	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% Vo,set	-	2% Vo,set	Vin=5V & 12V, full load
Load Regulation	-	0.1% Vo,set	-	
Line Regulation	-	0.1% Vo,set	-	
Regulation Over Temperature (-40°C to +85°C)	-	0.3Vo,set	-	Tref=Ta, min to Ta, max
Output Current	0 A	-	10 A	
Current Limit Threshold	-	200% Io,out	-	
Short Circuit Surge Transient	-	1 A ² s	3 A ² s	
Ripple and Noise (pk-pk)	-	30 mV	80 mV	Tested with 0-20MHz, with 10uF tantalum capacitor & 1uF ceramic capacitor at the output
Ripple and Noise (rms)	-	12 mV	35 mV	
Turn on Time	-	8 mS	20 mS	
Overshoot at Turn on	-	0%	1%	
Output Capacitance	0 uF	-	5600 uF	
Transient Response				
50% ~ 100% Max Load	Vo = 0.75 V - 3.63 V	-	160 mV	di/dt=2.5 A/uS; Vin=5 V & 12 V; and with 470 uF Tantalum capacitor at the output
Settling Time		-	50 uS	
100% ~ 50% Max Load		-	160 mV	
Settling Time		-	50 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

4.5 V-14 V Input

0.75 V-3.63 V/10 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				
Vo=3.3 V	-	94.3%	-	Measured at Vin=5V, full load
Vo=2.5 V	-	93%	-	
Vo=1.8 V	-	91.5%	-	
Vo=1.5 V	-	90.8%	-	
Vo=1.2 V	-	89.3%	-	
Vo=0.75 V	-	83%	-	
Efficiency				
Vo=3.3 V	-	93%	-	Measured at Vin=12V, full load
Vo=2.5 V	-	92%	-	
Vo=1.8 V	-	90%	-	
Vo=1.5 V	-	89%	-	
Vo=1.2 V	-	87.5%	-	
Vo=0.75 V	-	81%	-	
Switching Frequency	265 kHz	300 kHz	335 kHz	
Over Temperature Shutdown	-	130°C	-	
Output Voltage Trim Range	0.7525 V	-	3.63 V	
Remote Sense Compensation	-	-	0.5 V	
MTBF	5,114,191 hours			Calculated Per Bell Core TR-332 (Io = 80%Io,max; Vo=3.3 V; Vin=12 V; Ta = 25 °C)
Dimensions				
Inches (L x W x H)	2.0 x 0.5 x 0.32			
Millimeters (L x W x H)	50.8 x 12.7 x 8.13			
Weight	-	7.1 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.2 V	-	0.3 V	V7BC-10E2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	-	-	Vin, max	
Signal Low (Unit On)	-0.2 V	-	0.3 V	V7BC-10E2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5 V	-	Vin, max	
Voltage Sequencing				
Sequencing Delay Time	25 mS	-	-	Delay from Vin, min to application of voltage on SEQ pin
Sequencing Slew Rate Capability	-	-	2 V/mS	Vin, min to Vin, max; Io, min to Io, max; Vseq<Vo
Tracking Accuracy	-	100 mV	200 mV	
Power-Up	-	300 mV	500 mV	
Power-Down	-			

NON-ISOLATED DC/DC CONVERTERS

4.5 V-14 V Input


0.75 V-3.63 V/10 A Output

bel
POWER PRODUCTS

Output Trim Equations


Equation for calculating the trim resistor (in Ω) given the desired output voltage (V_o) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{10500}{V_o - 0.7525} - 1000$$

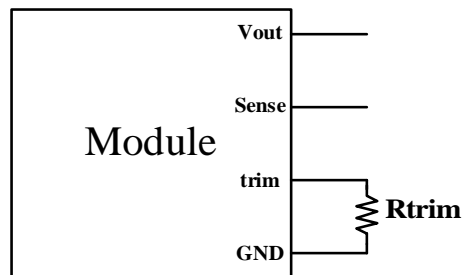

Equation for calculating the trim voltage (in V) given the desired output voltage (V_o) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{trim} = 0.7 - 0.0667 \times (V_o - 0.7525)$$

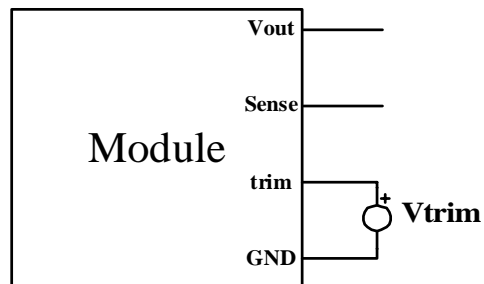







NON-ISOLATED DC/DC CONVERTERS

4.5 V-14 V Input

0.75 V-3.63 V/10 A Output



Efficiency Data

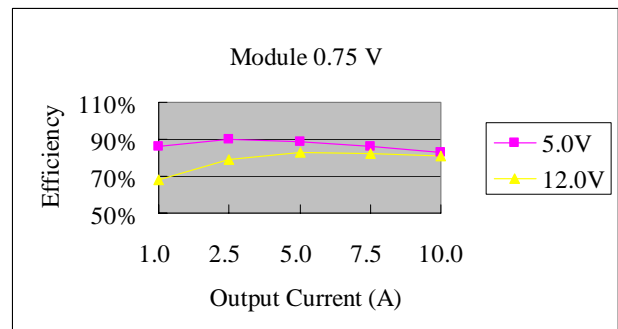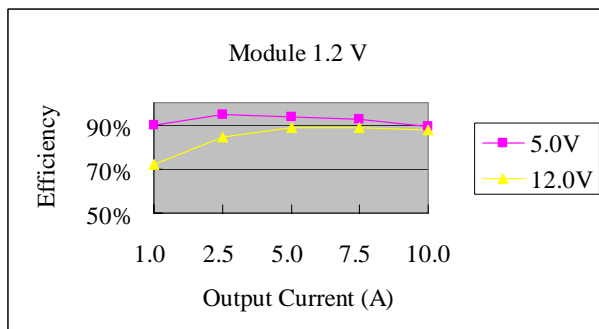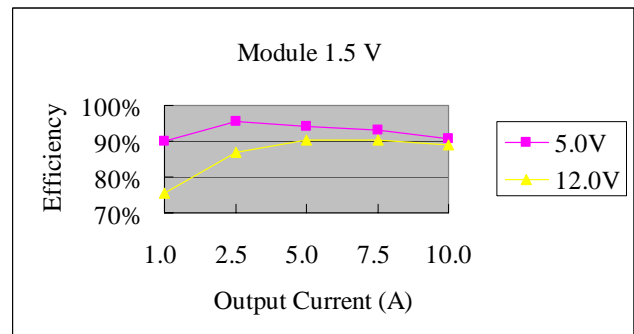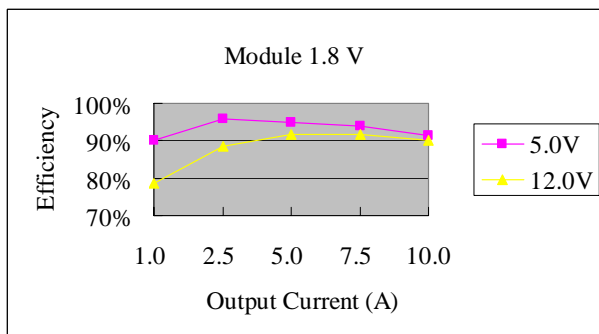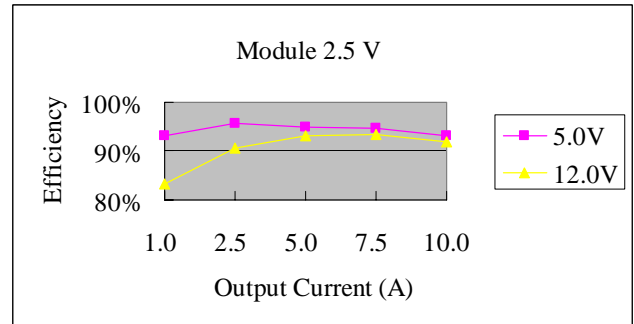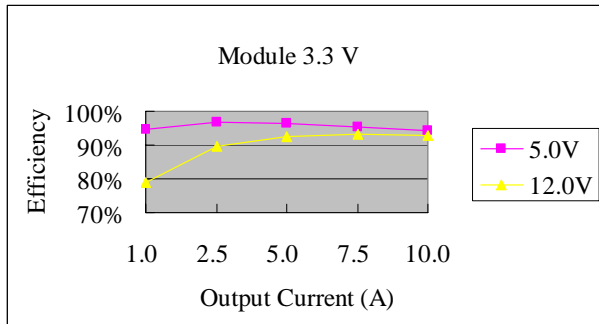


NON-ISOLATED DC/DC CONVERTERS

4.5 V-14 V Input


0.75 V-3.63 V/10 A Output

bel
POWER PRODUCTS

Thermal Derating Curves

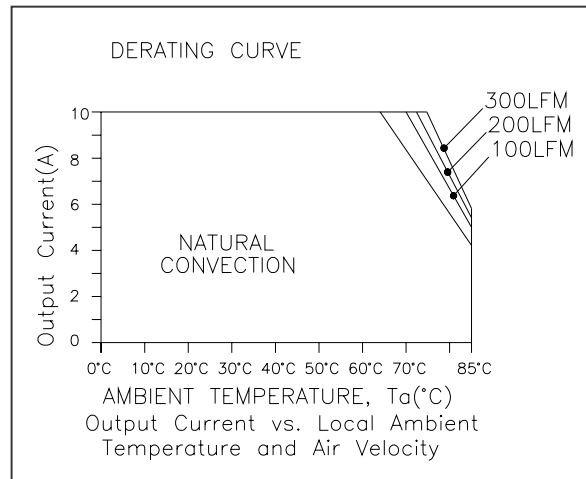

$V_{in}=12\text{ V}$, $V_o = 3.3\text{ V}$

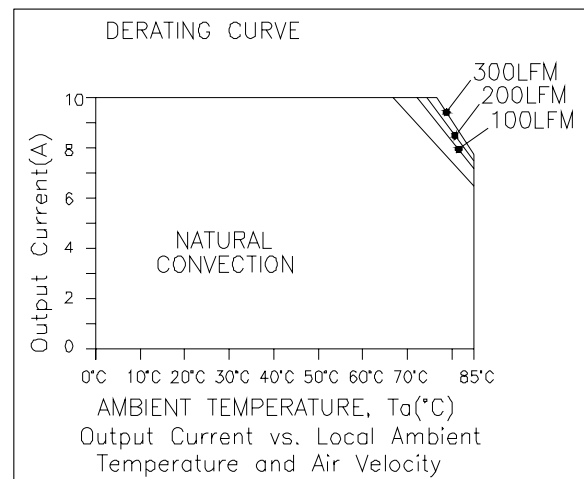


$V_{in}=5\text{ V}$, $V_o = 3.3\text{ V}$

NON-ISOLATED DC/DC CONVERTERS


4.5 V-14 V Input

0.75 V-3.63 V/10 A Output


bel
POWER PRODUCTS

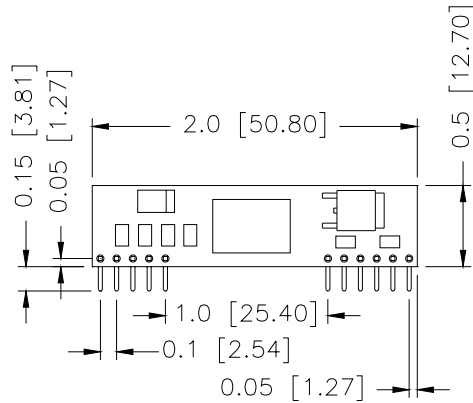

TOP VIEW




SIDE VIEW




UNIT: INCH [MM]

BACK VIEW

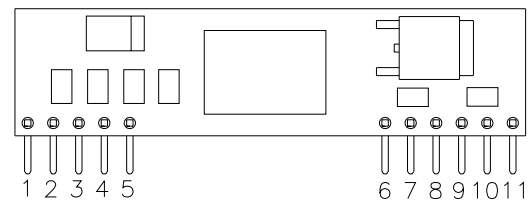

RECOMMENDED PAD LAYOUT

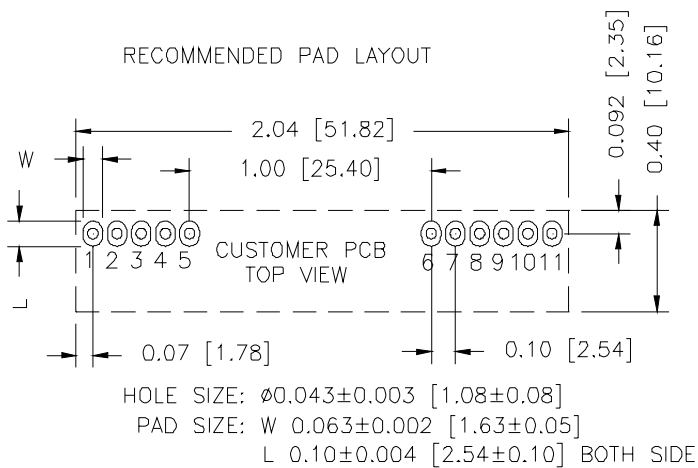

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Remote Sense
4	Vout
5	Ground
6	Ground
7	Vin
8	Vin
9	SEQ
10	Trim
11	Remote On/Off

©2004 Bel Fuse Inc. Specifications subject to change without notice. 040805

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com